




Rubinetterie Italiane Velatta SpA

————— since 1950 —————

>> YOU need the BEST

TURCHESE

Series

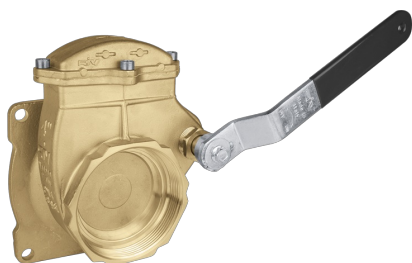


RIV 580

Lever gate valve
 flange/thread

>> Tech drawings and tables

DN	Codice	Ø	A	F	H	h	L	S	PN	KG	P/box
4"	050580000016	92	150	22	242	152	470	100	4bar - 58psi	6,690	1
6"	050580000019	144	150	22	320	230	525	113	2,5bar - 37psi	12,134	1

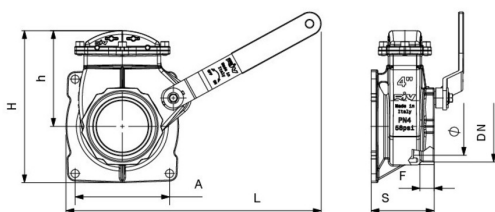

» Advantages

This type of lever gate valve differs from the others in that it has a wedge composed by two horizontally pivoted disks (Pict. A) so that it can always fit perfectly the tapered seat (Pict. B) assuring a perfect valve tightness.

Great capacity that allows to avoid the clogging of the valve.


Anticorrosion stainless steel screws.

In accordance with 97/23/CE (**PED**) Directives.

>> Technical data

RIV 560

Nr.	Cod.
2	Riv 9863
3	Riv 9864
4	Riv 9870
5	Riv 9868
6	Riv 9869
7	Riv 9871
8	Riv 9865
9	Riv 9866
10	Riv 9875
11	Riv 9874

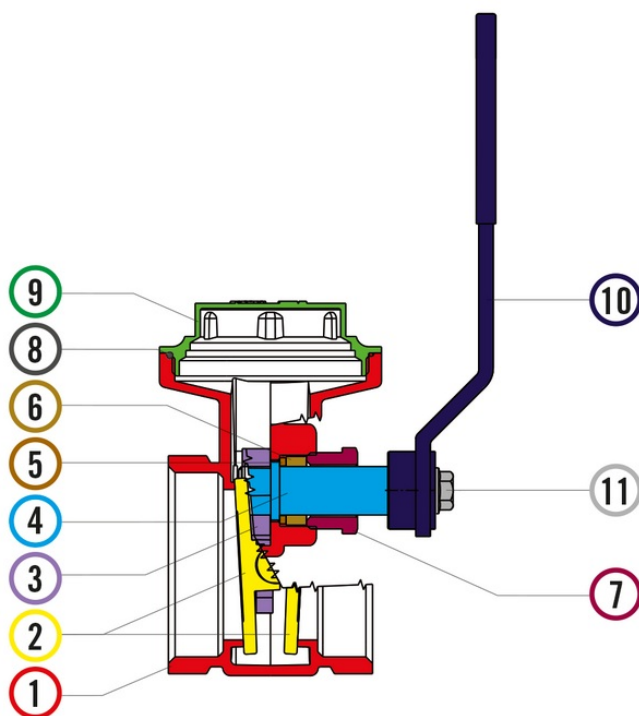

Materials				
1	Body	Brass	CB754S	
2	Disks	Brass	CB754S	
3	Inner Lever	Brass	CW617N	
4	Stem	Brass	CW614N	
5	Washer	Brass	CW614N	
6	Tow packing	Fibre		
7	Stuffing-Box	Brass	CW614N	
8	O-Ring	NBR		
9	Plug	Brass	CW617N	
10	Lever	Steel		Zinc-plated
11	Screw	Steel		Zinc-plated

Connection

F: ISO 228/1, ANSI B1.20.1 (NPT)
 Square flange


Limit

0°C (+32°F) without liquid +60°C (+140°F)

Notes


The max.working pressure (PN) means at a room temperature of about 23°C.

» More Products



RIV 560

Lever gate valve



RIV 561

Lever gate valve
NPT threaded



RIV 581

Lever gate valve flange/thread
NPT threaded