



LSC PUDDLE SUCKER 240 V RESIDUE DRAINAGE SUBMERSIBLE PUMP



SINGLE PHASE SUBMERSIBLE PUMP · 175 L/MIN · 11 M HEAD

124 LSC1.4S

BARCODE: 9346472030598




The LSC pump is a submersible single-phase portable residue drainage pump. The specially designed bottom plate enables the pump to drain down to a 1 mm water level. It has a swing check valve that prevents the reverse flow of the sucked water when the pump stops its operation. The rubber stand protects the floor surface from scratching. The discharge direction is selectable between vertical and inclined to prevent the folding or bending of the discharge hose.

FEATURES

- Specially designed bottom plate enables the pump to drain down to 1 mm
- Rubber stand prevents floor surface scratching
- Anti wicking cable offers maximum protection against water penetrating through the cable entry should the cable be damaged extending the life of your pump.
- Thermal motor protector
- Dual mechanical seals with silicon carbide face provides 5 times higher corrosion wear and heat resistance than tungsten carbide.
- Tsurumi original design oil lifter prolonging seal life
- Discharge direction is selectable between vertical and inclined which prevents folding or bending of the discharge hose.

SPECIFICATIONS

- **Maximum Flow:** 175 L/min
- **Max Head:** 11 m
- **Motor Type:** 240 V - 0.48 kW
- **Discharge Bore:** 1"
- **Impeller Type:** Semi-vortex urethane rubber
- **Starting Method:** Capacitor run
- **Cable Length:** 10 m
- **Dimensions:** 196 mm W x 316 mm H

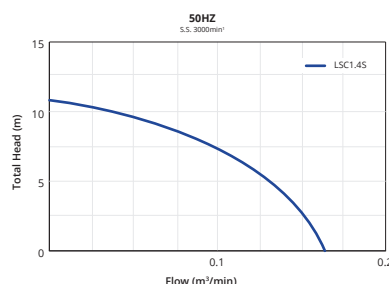

Part #	Type	Motor Type	Head	Discharge Size	Flow	Pump Weight:
124 LSC1.4S	Manual	240V - 0.48 kW	11 m	25 mm	0.175 m³/min (175 L/min)	16.5 kg

RELATED PRODUCTS



124 LB-480

LB SLIMLINE
SERIES



124 LB-480A

LB SLIMLINE
SERIES



124 HSZ2.4S

HSZ 240 V
AUTOMATIC
SERIES



124 HSZ2.75S

HSZ 240 V
AUTOMATIC
SERIES



124 KTVE21.5

KTVE AUTOMATIC
415 V SERIES